

EROSION CONTROL & GRADING NOTES

- 1) EXPOSE AS SMALL AN AREA OF SOIL AS POSSIBLE ON THE SITE FOR NO MORE THAN 15 DAYS. KEEP DUST WITHING TOLERABLE LIMITS BY SPRINKLING OR OTHER ACCEPTABLE MEANS.
- 2) ALL CUT/FILL AREAS TO HAVE A MINIMUM OF 6" OF TOPSOIL COVER. AREAS DRESSED WITH TOPSOIL SHALL RECEIVE 1200 POUNDS PER 1000 SQUARE FEET OF 12-12 FERTILIZER (UNLESS OTHER WISE SPECIFIED IN WRITTEN SPECIFICATIONS). 5 POUNDS OR MORE OF KENTUCKY 31 FESCUE SEED PER 1000 SQUARE FEET, AND A STRAW MULCH COVER OF 70%-80% COVERAGE (APPROXIMATELY 125 POUNDS PER 1000 SQUARE FEET), UNLESS OTHERWISE NOTED WITHIN WRITTEN SPECIFICATIONS.
- 3) EROSION CONTROL BARRIER IS CALLED OUT ON PLANS AND IS TO COMPLY WITH THE METROPOLITAN STORMWATER MANAGEMENT MANUAL, VOLUME FOUR, SECTION TCP-14.
- 4) DISTURBED AREAS ARE TO BE GRADED TO DRAIN AS INDICATED IN THE PLAN TO SEDIMENT BARRIERS DURING AND UPON THE COMPLETION OF CONSTRUCTION.
- 5) THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE VERIFICATION AND THE LOCATION OF ANY EXISTING UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO AVOID DAMAGE TO ALL EXISTING UTILITIES DURING CONSTRUCTION. IF DAMAGE DOES OCCUR TO ANY SUCH INSTALLATION, FULL REPAIR WILL BE ACCOMPLISHED AS PER THE CURRENT SPECIFICATION GOVERNING SUCH WORK.
- 6) ANY ACCESS ROUTES TO THE SITE SHALL BE BASED WITH CRUSHED STONE, ASTM #1 STONE, 100 FEET LONG AND AT LEAST 6" THICK.
- 7) THE PLACING AND SPREADING OF ANY FILL MATERIAL IS TO BE STARTED AT THE LOWEST POINT AND BROUGHT UP IN HORIZONTAL LAYERS OF 8" THICKNESS (OR AS DIRECTED BY THE SOIL'S INVESTIGATIVE REPORT). SAID FILL MATERIAL IS TO BE FREE OF SOD, ROOTS, FROZEN SOILS, OR ANY OTHER DECOMPOSABLE MATERIAL. SAID FILL IS TO BE COMPACTED TO A MINIMUM OF 95% STANDARD PROCTOR, OR AS OTHERWISE SPECIFIED BY THE SOILS REPORT OR WRITTEN SPECIFICATIONS.
- 8) THE CONTRACTOR SHALL NOTIFY THE METRO DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS CONSTRUCTION COMPLIANCE DIVISION, THREE DAYS PRIOR TO BEGINNING THE WORK.
- 9) THE CONTRACTOR SHALL LOCATE AND STAKE THE LAYOUT OF THE SITE IN THE FIELD FOR INSECTION BY THE ENGINEER. THE CONTRACTOR SHALL CHECK THE GRADES AND FINAL DIMENSIONS ON THE GROUND, AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY FOR A DECISION.
- 10) SURPLUS EXCAVATION OF TOPSOIL SHALL BE PLACED ON THE SITE AS APPROVED BY THE OWNER FOR THE PURPOSE OF FUTURE LANDSCAPE USE.
- 11) THE CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY TEMPORARY WORKS FOR THE PROTECTION OF THE PUBLIC AND EMPLOYEES, INCLUDING WARNING SIGNS AND LIGHTS.
- 12) THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE PREMISES OR ADJACENT PREMISES OR INJURIES TO THE PUBLIC DURING THE CONSTRUCTION CAUSED BY HIMSELF, HIS SUB-CONTRACTORS, OR THE CARELESSNESS OF ANY OF HIS EMPLOYEES.
- 13) ALL WORK IS TO BE COMPLETED WITH COMPLIANCE TO THE RULES AND REGULATIONS SET FORTH BY METRO WATER SERVICES. THE CONTRACTOR SHALL GIVE ALL NECESSARY NOTICE, OBTAIN ALL PERMITS, AND PAY FEES REQUIRED FOR THE COMPLETION OF HIS PORTION OF THE WORK. HE SHALL ALSO COMPLY WITH ALL CITY, COUNTY AND STATE LAWS AND ORDINANCE OR REGULATIONS RELATING TO PORTIONS OF WORK WHICH HE IS TO PERFORM.
- 14) ALL EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL SITE IS STABILIZED & CONSTRUCTION IS COMPLETE.
- 15) CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUELING IN ACCORDANCE WITH METRO CP-10 & CP-13. LOCATION TO BE COORDINATED WITH THE NPDES DEPARTMENT DURING THE PRE-CONSTRUCTION MEETING.

LANDSCAPE NOTES

- 1) THE LANDSCAPE CONTRACTOR SHALL COORDINATE ALL CONSTRUCTION WITH THE APPROPRIATE UTILITY COMPANY AND SHALL BE RESPONSIBLE FOR AND DAMAGE TO UTILITIES. THE LANDSCAPE CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES AND TAKE PRECAUTIONS TO PREVENT DAMAGE TO THE UTILITIES.
- 2) ALL PLANTING AND MULCH BEDS SHALL BE SPRAYED WITH ROUND-UP (CONTRACTOR'S OPTION) PRIOR TO THE INSTALLATION OF MULCH.
- 3) PLANT MATERIALS AND STUMPS INDICATED FOR REMOVAL SHALL BE REMOVED AND DISPOSED OFF-SITE BY THE CONTRACTOR. BACKFILL HOLES WITH TOPSOIL FREE OF ROOTS AND ROCKS.
- 4) THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FINE GRADING OF ALL PLANTING AREAS.
- 5) ALL PLANTING AREAS SHALL BE FERTILIZED WITH 12W/1000 S.F. OF 10-10-10 FERTILIZER.
- 6) ALL PLANTING BEDS SHALL HAVE A MINIMUM OF 3" DEPTH OF SHREDDED HARDWOOD BARK MULCH.
- 7) THE LANDSCAPE CONTRACTOR SHALL VERIFY ALL MATERIAL QUANTITIES. IN THE EVENT OF A DISCREPANCY, THE QUANTITIES SHOWN ON THE PLAN WILL TAKE PRECEDENCE.
- 8) THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE OWNER WITH WRITTEN INSTRUCTIONS ON THE PROPER CARE OF ALL SPECIFIED PLANT MATERIALS PRIOR TO FINAL PAYMENT.
- 9) EXISTING TREES TO REMAIN SHALL BE PROTECTED FROM CONSTRUCTION DAMAGE. SELECTIVELY PRUNE DEAD WOOD.
- 10) ALL DISTURBED AREAS SHALL BE PLANTED WITH TURF AS INDICATED ON THE MATERIALS SCHEDULE.
- 11) ALL DECIDUOUS TREES, EXISTING AND PROPOSED SHALL BE PRUNED TO PROVIDE 4' MINIMUM CLEAR TRUNK UNLESS OTHERWISE NOTED.
- 12) THE LANDSCAPE CONTRACTOR SHALL PROVIDE A ONE YEAR WARRANTY ON ALL PLANT MATERIALS AND REPLACE ANY DEAD OR DYING MATERIAL WITHIN THAT TIME PERIOD.
- 13) NO PLANT MATERIALS SHOULD BE SUBSTITUTED WITHOUT AUTHORIZATION BY DALE & ASSOCIATES. PLANT SIZES SHOWN ARE MINIMUMS REQUIRED BY THE LOCAL MUNICIPALITY AND MATERIALS SHOWN HAVE BEEN SELECTED SPECIFICALLY FOR THIS PROJECT.
- 14) ALL WIRE BASKETS SHALL BE COMPLETELY REMOVED AND DISPOSED OF. BURLAP SHOULD BE REMOVED OR PUNCTURED IN AT LEAST 5 PLACES. REMOVE ALL TWINE FROM BURLAPPED MATERIALS.
- 15) GUYING IS NOT ALLOWED UNLESS REQUIRED BY MUNICIPALITY OR SITE CONDITIONS. THE LANDSCAPE CONTRACTOR SHALL REMOVE WIRES AFTER A ONE YEAR PERIOD.
- 16) NO CANOPY TREE SHALL BE LOCATED WITHIN 15' OF AN OVERHEAD UTILITY. NO TREE SHALL BE LOCATED WITHIN A PUBLIC UTILITY EASEMENT. LOCATING PLANT MATERIALS WITHIN A DRAINAGE EASEMENT IS ACCEPTABLE, BUT ONLY IF INSTALLED AS NOT TO DISTURB EXISTING DRAINAGE FLOW. IN SUCH INSTANCES, THE MATERIALS SHALL BE LOCATED NO CLOSER THAN 5' FROM THE CENTERLINE OF DRAINAGE.
- 17) LIGHTING PLAN TO BE COORDINATED WITH PROPOSED PLANTING PLAN. NO LIGHT POLES TO BE LOCATED IN TREE ISLANDS. SEE LIGHTING PLAN FOR PROPOSED LIGHT LOCATIONS.

FIRE MARSHALL

FIRE APPARATUS ACCESS MUST EXTEND TO WITHIN 150 FEET (250 FEET FULL SPRINKLERED) OF ALL POINTS OF THE BUILDING. (NFPA 1 SECTION 18.2.3.2.2.1 AMENDED)

FIRE FLOW SHALL MEET THE REQUIREMENTS OF THE INTERNATIONAL FIRE CODE- 2006 EDITION
FIRE CODES ISSUES WILL BE ADDRESSED IN THE PERMIT PHASE.
THIS PLAN PROVIDES LIMITED BUILDING DETAIL, AND/ OR BUILDING CONSTRUCTION INFORMATION PROVIDED. CONSTRUCTION MUST MEET ALL APPLICABLE BUILDING AND FIRE CODES. ANY ADDITIONAL FIRE CODE OR ACCESS ISSUES WILL BE ADDRESSED DURING THE CONSTRUCTION PERMITTING PROCESS. FUTURE DEVELOPMENT OR CONSTRUCTION MAY REQUIRE CHANGES TO MEET ADOPTED FIRE AND BUILDING CODES.

STANDARD SP NOTES

- 1) THE PURPOSE OF THIS SP IS TO PERMIT A 112,000 SQUARE FOOT SELF STORAGE FACILITY
- 2) ANY EXCAVATION, FILL OR DISTURBANCE OF THE EXISTING GROUND ELEVATION MUST BE DONE IN ACCORDANCE WITH STORM WATER MANAGEMENT ORDINANCE NO. 79-84 & APPROVED BY THE METROPOLITAN DEPARTMENT OF WATER SERVICES.
- 3) THIS PROPERTY DOES NOT LIE WITHIN A FLOOD HAZARD AREA AS IDENTIFIED BY FEMA FLOOD MAP 47037C0267H DATED APRIL 5, 2017.
- 4) ALL PUBLIC SIDEWALKS ARE TO BE CONSTRUCTED IN CONFORMANCE WITH METRO NDOT DESIGN STANDARDS.
- 5) WHEEL CHAIR ACCESSIBLE CURB RAMPS, COMPLYING WITH APPLICABLE NDOT STANDARDS, SHALL BE CONSTRUCTED AT STREET CROSSINGS.
- 6) THE REQUIRED FIRE FLOW SHALL BE DETERMINED BY THE METROPOLITAN FIRE MARSHAL'S OFFICE, PRIOR TO THE ISSUANCE OF A BUILDING PERMIT.
- 7) SIZE DRIVEWAY CULVERTS PER THE DESIGN CRITERIA SET FORTH BY THE METRO STORMWATER MANUAL (MINIMUM DRIVEWAY CULVERT IN METRO RIGHT OF WAY IS 15" RCP).
- 8) METRO WATER SERVICES SHALL BE PROVIDED SUFFICIENT & UNENCUMBERED INGRESS & EGRESS AT ALL TIMES IN ORDER TO MAINTAIN, REPAIR, REPLACE & INSPECT ANY STORMWATER FACILITIES WITHIN THE PROPERTY.
- 9) INDIVIDUAL WATER AND/OR SANITARY SEWER SERVICE LINES ARE REQUIRED FOR EACH UNIT.
- 10) SOLID WASTE PICKUP SHALL BE PRIVATE.
- 11) MINOR MODIFICATIONS TO THE PRELIMINARY SP PLAN MAY BE APPROVED BY THE PLANNING COMMISSION OR ITS DESIGNEE BASED UPON FINAL ARCHITECTURAL, ENGINEERING OR SITE CONSTRUCTION. ALL MODIFICATIONS SHALL BE CONSISTENT WITH THE PRINCIPLES AND FURTHER THE OBJECTIVES OF THE APPROVED PLAN. MODIFICATIONS SHALL NOT BE PERMITTED, EXCEPT THROUGH AN ORDINANCE APPROVED BY METRO COUNCIL THAT INCREASE THE PERMITTED DENSITY OR FLOOR AREA, ADD USES NOT OTHERWISE PERMITTED, ELIMINATE SPECIFIC CONDITIONS OR REQUIREMENTS CONTAINED IN THE PLAN AS ADOPTED THROUGH THIS ENACTING ORDINANCE, OR ADD VEHICULAR ACCESS POINTS NOT CURRENTLY PRESENT OR APPROVED.
- 12) FOR ANY DEVELOPMENT STANDARDS, REGULATIONS AND REQUIREMENTS NOT SPECIFICALLY SHOWN ON THE SP PLAN AND/OR INCLUDING A CONDITION OF PLAN IS SHOWN SCHEMATICALLY. FINAL DESIGN WILL BE PROVIDED DURING THE STANDARDS, REGULATIONS AND REQUIREMENTS OF THE CS ZONING DISTRICT AS OF THE DATE OF THE APPLICABLE REQUEST OR APPLICATION.
- 13) THE FINAL SITE PLAN/BUILDING PERMIT SITE PLAN SHALL DEPICT THE REQUIRED PUBLIC SIDEWALKS, ANY GRASS STRIP OR FRONTAGE ZONE AND THE LOCATION OF ALL EXISTING AND PROPOSED VERTICAL OBSTRUCTIONS WITHIN THE REQUIRED SIDEWALK AND GRASS STRIP OR FRONTAGE ZONE. PRIOR TO THE ISSUANCE OF USE AND OCCUPANCY PERMITS, EXISTING VERTICAL OBSTRUCTIONS SHALL BE RELOCATED OUTSIDE OF THE REQUIRED SIDEWALK. VERTICAL OBSTRUCTIONS ARE ONLY PERMITTED WITHIN THE REQUIRED GRASS STRIP OR FRONTAGE ZONE.
- 14) ALL DEVELOPMENT WITHIN THE BOUNDARIES OF THIS PLAN MEETS THE REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT AND THE FAIR HOUSING ACT AND THE FAIR HOUSING ACT. ADA: <http://ada.gov/>
- 15) LANDSCAPING TREE DENSITY REQUIREMENTS PER METRO ZONING ORDINANCE.

Stormwater Notes

1. This site is responsible for water quality and water quantity.
2. To provide the full water quality treatment of 80% TSS a water various quantity/quality BMPs are proposed. Design of these features will be provided during the final SP process.
3. Storm sewer systems on this plan is shown schematically. Final design will be provided during the final SP process and will meet the requirements of the stormwater management manual.
4. This project will disturb less more 1 acre, therefore, NOI will be required to be submitted to TDEC during final SP process.
5. This Drawing is for illustration purposes to indicate the basic premise of the development, as it pertains to Stormwater approval / comments only. The final or unit lot count and details of the plan shall be governed by the appropriate stormwater regulations at the time of final application.

GENERAL PLAN CONSISTENCY NOTE

T3 SUBURBAN COMMUNITY CENTER (T3-CC) ARE AREAS THAT CREATE AND/OR ENHANCE SUBURBAN COMMUNITY CENTERS ENCOURAGING THEIR DEVELOPMENT OR REDEVELOPMENT AS INTENSE MIXED USE AREAS THAT ARE COMPATIBLE WITH THE GENERAL CHARACTER OF SUBURBAN NEIGHBORHOODS AS CHARACTERIZED BY THE SERVICE AREA, DEVELOPMENT PATTERN, BUILDING FORM, LAND USE, AND ASSOCIATED PUBLIC REALM


THE SPECIFIC PLAN PROPOSED HEREIN IS LOCATED WITHIN DONELSON, HERMITAGE, OLD HICKORY COMMUNITY. AS PROPOSED, THIS SPECIFIC PLAN DISTRICT CREATES MULTILEVEL SELF STORAGE FACILITY WITHIN AN AREAS THAT IS CURRENTLY INDUSTRIAL AND OFFICE IN NATURE AND IS WELL SITUATED NEAR A MAJOR INTERSECTION WITH NO ADJACENT RESIDENTIAL USES

ARCHITECTUAL NOTES

BUILDING ELEVATIONS FOR ALL FACADES SHALL BE PROVIDED WITH THE FINAL SITE PLAN UPON SUBMITAL OF THE FINAL SP

Exterior finish to be architectural metal panels with 3' brick wainscot. 3' overhang at top of parapet 42'-6". Proposed glazing amount would be ~ 1600 SF. On the Primary Façade.

Building façades fronting a street shall provide a minimum of one principal entrance (doorway)

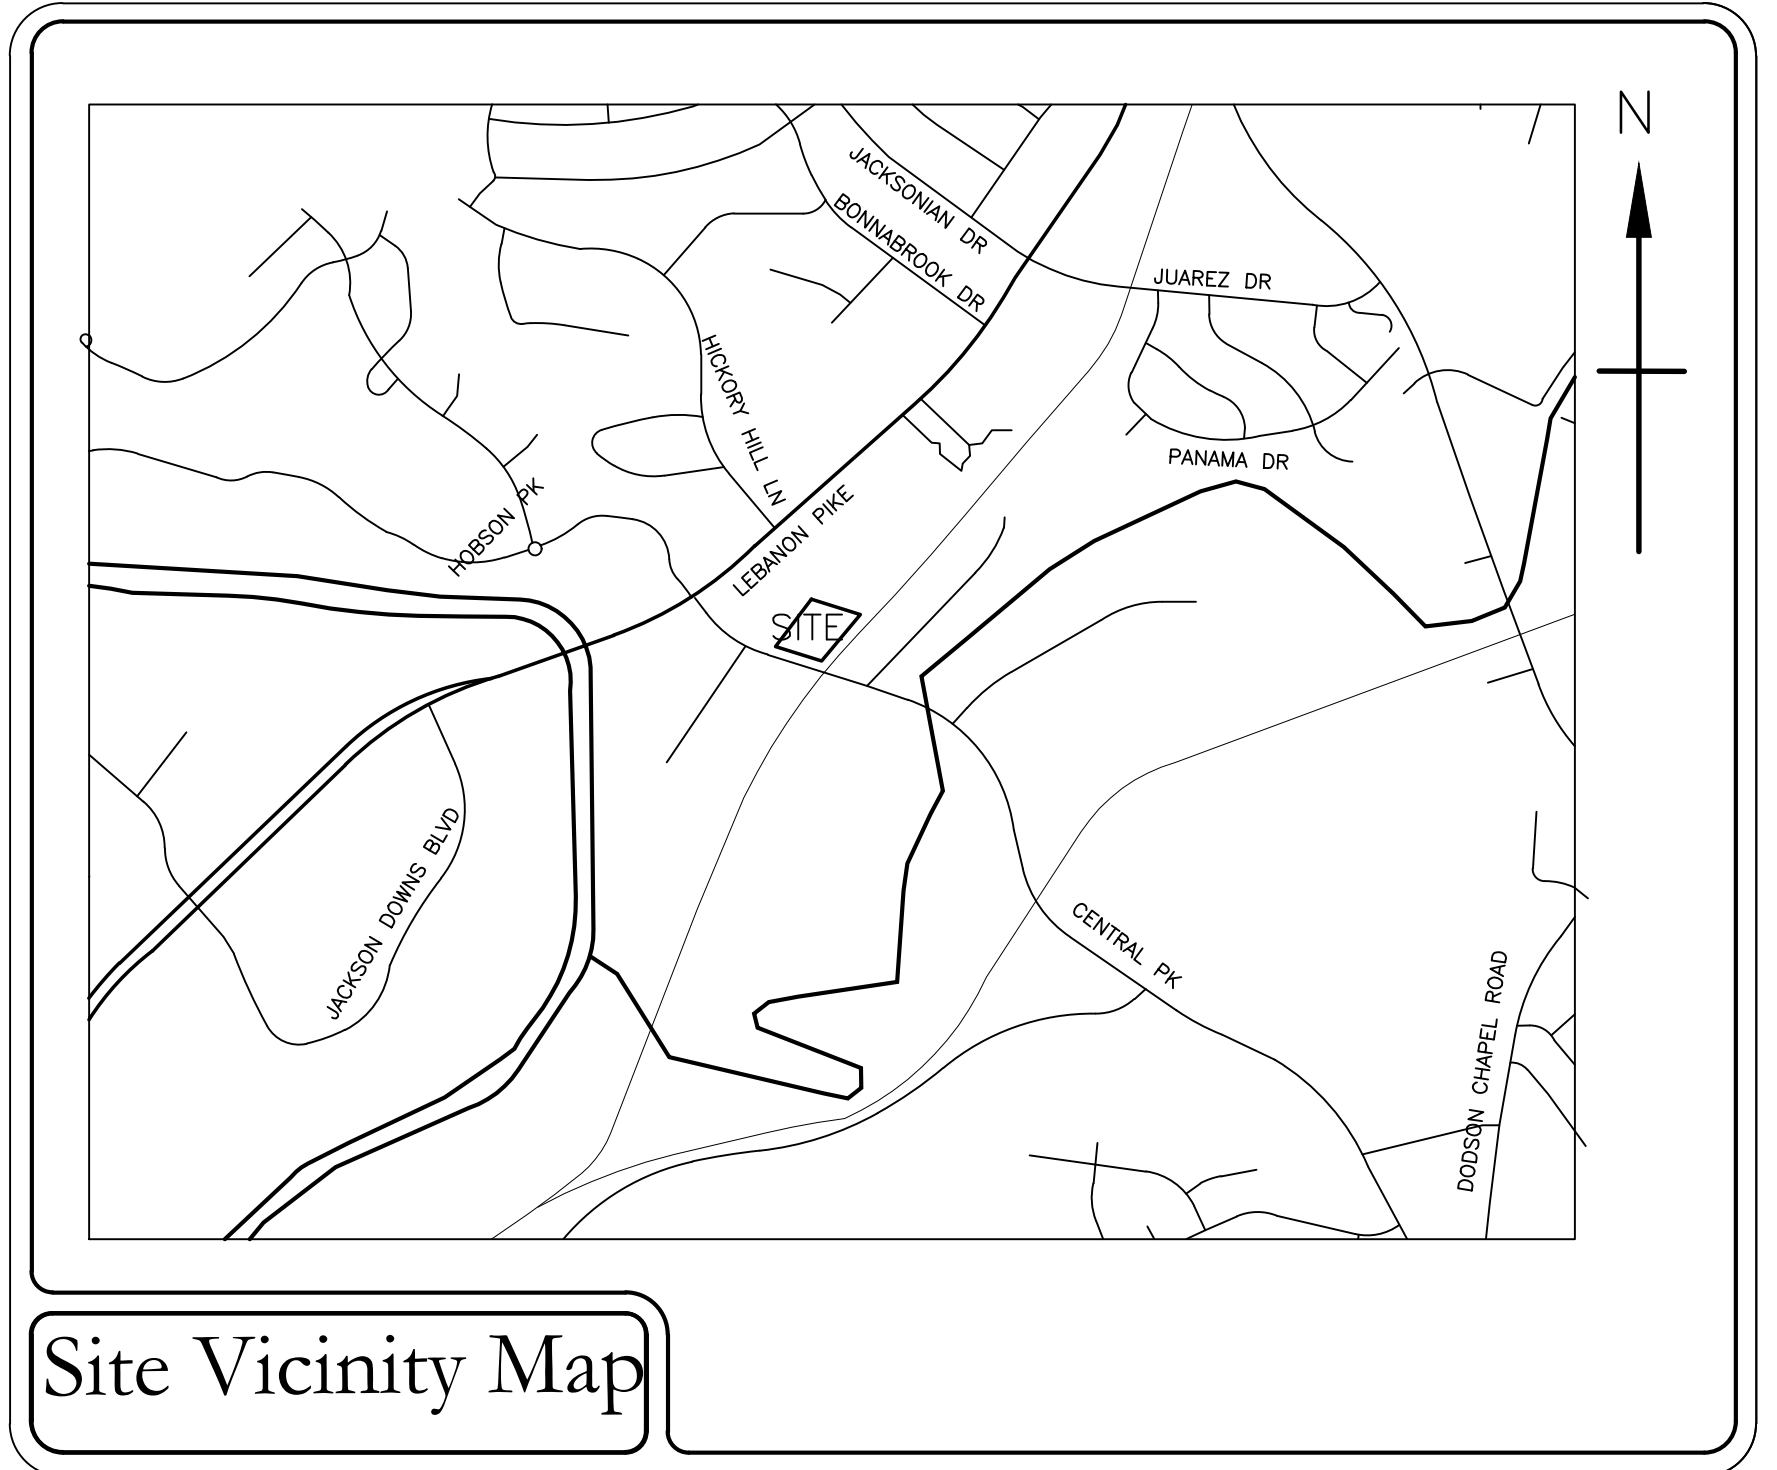

Site Vicinity Map

SPECIFIC PLAN DEVELOPMENT SUMMARY

USE	COMMERCIAL/SELF STORAGE
PROPERTY ZONING	CS
TOTAL PROPERTY SIZE	2.12 ACRES
TOTAL BUILDING FLOOR AREA	112,000 SF
FAR	1.22
ISR	0.60
STREET YARD SETBACK:	50' MEASURED FROM RIGHT OF WAY
SIDE YARD	10'
REAR YARD	20'
HEIGHT STANDARDS	3 STORIES MAX. IN 45 FT (OVERALL HEIGHT TO BE MEASURED FROM THE AVERAGE ELEVATION (AVERAGE OF 4 MOST EXTERIOR CORNERS) AT THE FINISHED GRADE TO THE MIDPOINT OF THE PRIMARY ROOF PITCH TO TOP OF PARAPET FOR A FLAT ROOF.
PARKING AND ACCESS	
RAMP LOCATION AND NUMBER	ONE POINT OF ACCESS – (1) CENTRAL PIKE
REQUIRED PARKING	4 SPACES
PARKING PROPOSED	13 PARKING SPACES

A Preliminary SP

3525 Central Pike SP

Being Parcels 769 on Tax Map 86

Davidson County, Tennessee

Case No. 2024SP-035-001

Sheet Schedule


C1.0 Notes & Project Standards

C2.0 Existing Conditions

C3.0 SP Layout

C4.0 Building Elevations


Notes & Project Standards

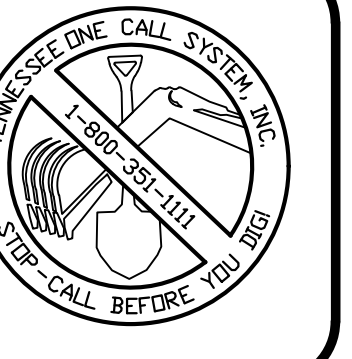


REVISIONS:

Preparation Date:

3525 Central Pike
Preliminary Specific Plan
Being Parcel 769 on Tax Map 86
Nashville, Davidson County, Tennessee

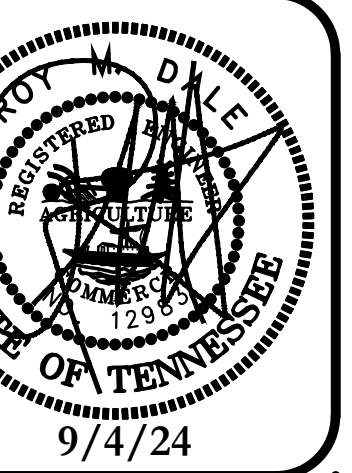

9/4/24

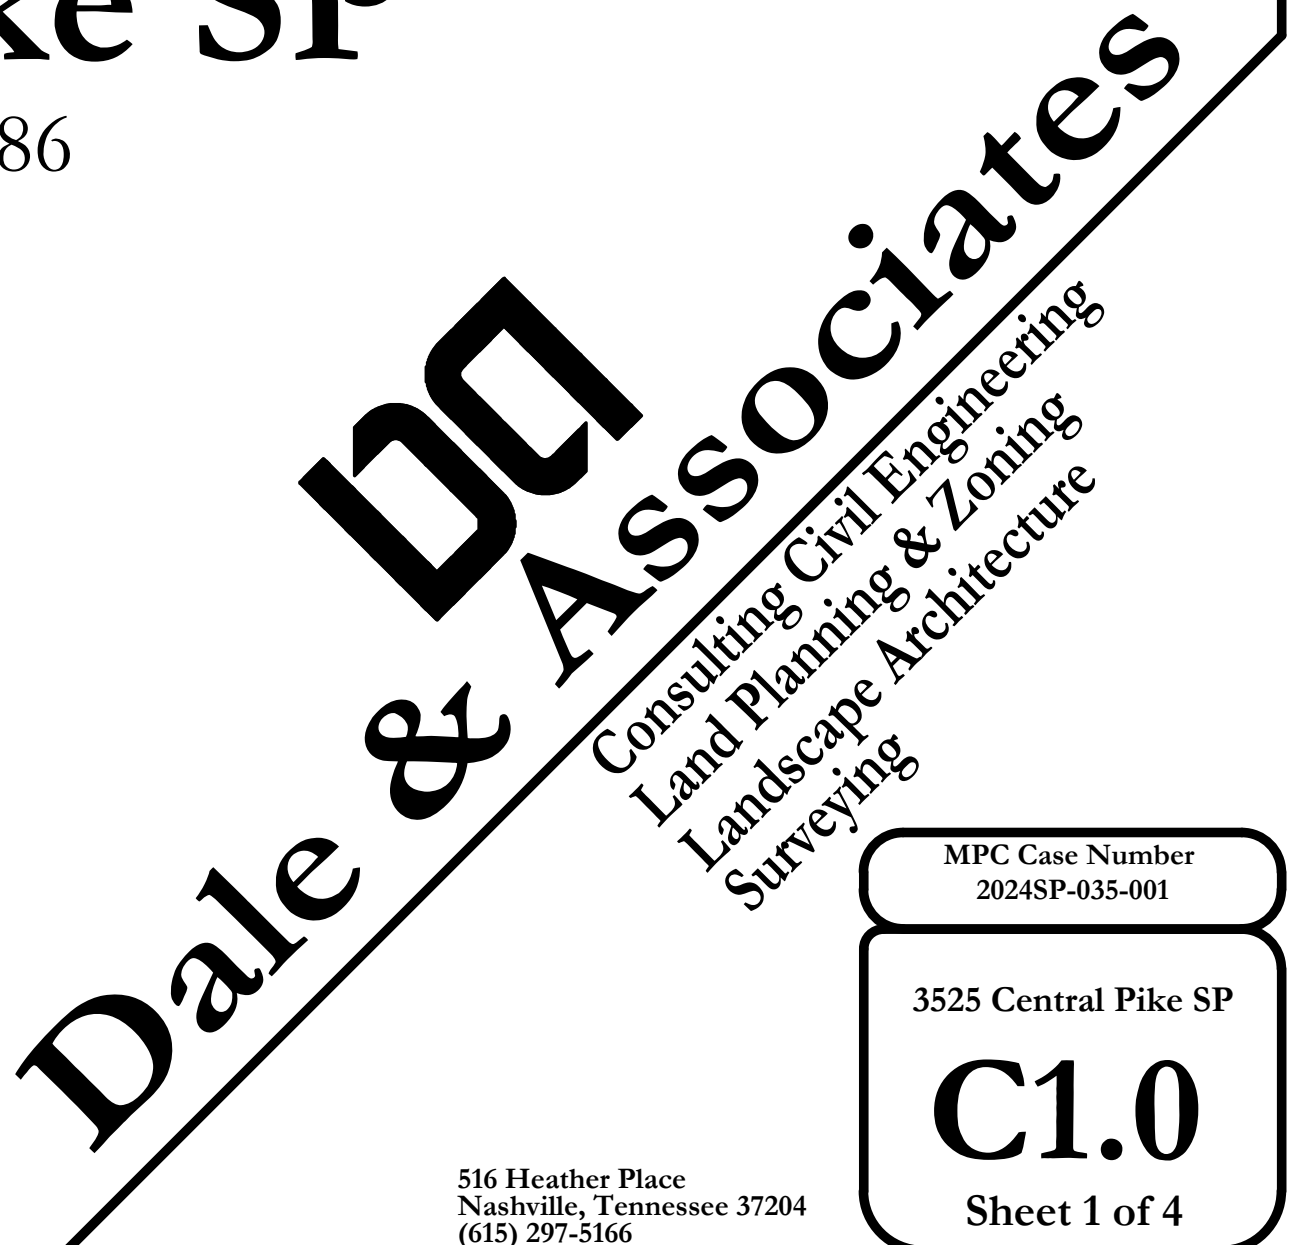

MPC Case Number
2024SP-035-001

3525 Central Pike SP

C1.0
Sheet 1 of 4

516 Heather Place
Nashville, Tennessee 37204
(615) 297-5166

NDOT NOTES

- 1) ALL WORK WITHIN THE PUBLIC RIGHT OF WAY REQUIRES AN EXCAVATION PERMIT FROM THE NASHVILLE DEPARTMENT OF TRANSPORTATION (NDOT).
- 2) PROOF-ROLLING OF ALL STREET SUBGRADES IS REQUIRED IN THE PRESENCE OF THE NDOT INSPECTOR. INSPECTION OF THE BINDER COURSE IS REQUIRED PRIOR TO FINAL PAVING IN THE PRESENCE OF THE PUBLIC WORKS INSPECTOR. THESE REQUESTS ARE TO BE MADE 24 HOURS IN ADVANCE.
- 3) STOP SIGNS ARE TO BE 30 INCH BY 30 INCH.
- 4) STREET SIGNS TO HAVE SIX INCH WHITE LETTERS ON A NINE INCH GREEN ALUMINUM BLADE, HIGH INTENSITY REFLECTIVE.
- 5) ALL PAVEMENT MARKING ARE TO BE THERMOPLASTIC.
- 6) THE DEVELOPER'S FINAL CONSTRUCTION DRAWINGS SHALL COMPLY WITH THE DESIGN REGULATIONS ESTABLISHED BY NDOT, IN EFFECT AT THE TIME OF THE APPROVAL OF THE PRELIMINARY DEVELOPMENT PLAN OR FINAL DEVELOPMENT PLAN OR BUILDING PERMIT, AS APPLICABLE. FINAL DESIGN MAY VARY BASED ON FIELD CONDITIONS.
7. COMPLY WITH THE NDOT TRAFFIC ENGINEER. UPON FINAL PLAN INDICATE THAT ADEQUATE SIGHT DISTANCE IS PROVIDED AT PROPOSED ROAD ACCESS POINTS.
8. DRIVEWAYS WITHIN THE DEVELOPMENT ARE TO BE A MINIMUM OF 24 FT WIDE (CURB TO CURB)
- 9 SOLID WASTE AND RECYCLING TO SERVED BY PRIVATE HAULER
10. IF SIDEWALKS ARE REQUIRED WITH THIS PROJECT THEY ARE TO BE SHOWN PER THE MCSP AND PER NDOT STANDARDS AND SPECIFICATIONS. SIDEWALKS ARE TO BE WITHIN DEDICATED RIGHT OF WAY.
11. SIDEWALKS ARE TO BE CONSTRUCTED IN RIGHT OF WAY PER MCSP AND NDOT STANDARDS AND SPECS. THERE SHALL BE NO VERTICAL OBSTRUCTIONS WITHIN THE PUBLIC SIDEWALK
12. AT DRIVEWAY ACCESS POINTS INSTALL GROUND MOUNTED SIGNS "NOW ENTERING PRIVATE PROPERTY" TO BE MAINTAINED BY THE HOME OWNERS ASSOCIATION
13. Prior to building permit approval submit a recorded HOA/ Master Deed document setting up private hauler for the development.

WATER & SEWER NOTES


- 1) ALL WATER AND SEWER CONSTRUCTION SHALL BE IN ACCORDANCE WITH SPECIFICATIONS AND STANDARD DETAILS OF THE METRO WATER SERVICES.
- 2) THE CONTRACTOR IS RESPONSIBLE FOR REIMBURSING THE METRO WATER SERVICES THE COST OF INSPECTION.
- 3) THE CONTRACTOR IS TO PROVIDE AND MAINTAIN THE CONSTRUCTION IDENTIFICATION SIGN FOR PRIVATE DEVELOPMENT APPROVED.
- 4) ALL CONNECTIONS TO EXISTING MANHOLES SHALL BE BY CORING AND RESILIENT CONNECTOR METHOD.
- 5) REDUCED PRESSURE BACKFLOW PREVENTION DEVICES (RPBP) OR DUAL CHECK VALVE WILL BE REQUIRED ON ALL TEST AND FILL LINES (JUMPER) NEEDED FOR WATER MAIN CONSTRUCTION AND MUST BE APPROVED BY THE METRO WATER SERVICES.
- 6) ALL WATER METERS SHALL BE A MINIMUM OF 24" NOT TO EXCEED A MAXIMUM OF 28" BELOW FINISHED GRADE.
- 7) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE CUSTOMER SIDE OF THE METER WHEN PRESSURES EXCEED 100 PSI.
- 8) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE STREET SIDE OF THE METER WHEN PRESSURES EXCEED 150 PSI.
- 9) PUBLIC WATER AND SEWER CONSTRUCTION MUST BE SUBMITTED AND APPROVED PRIOR TO FINAL SP APPROVAL. THESE APPROVED CONSTRUCTION PLANS MUST MATCH THE FINAL SP SITE PLAN. IF THE DEVELOPER PROPOSES TO CONSTRUCT A SHARED PRIVATE SEWER SYSTEM, A VARIANCE MUST BE APPROVED BY METRO WATER SERVICES. A VARIANCE REQUEST APPLICATION MUST CONTAIN A LETTER OF RESPONSIBILITY AND MUST MATCH THE FINAL SITE PLAN/ FINAL SP. A MINIMUM OF 30% OF WATER AND SEWER CAPACITY MUST BE PAID BEFORE THE ISSUANCE OF BUILDING PERMITS (WATER AND SEWER CAPACITY FEE PERMIT

CENTRAL PIKE

Currently Central Pike exceeds the requirements of the Major Thoroughway

Street: CENTRAL PIKE
MCSP Designation: T3-M-AB5
Standard Right-of-Way: 96 ft. 108 Right Of Way Provided
Half of Standard Right-of-Way: 48.00
Adopted Bikeway & Sidewalk Plan Facility: Existing Bikeway for Experienced Cyclists
Median Width: 0
On-Street Parking Requirement: 0 side(s)
Bikeway Buffer: 0
Bikeway Width: 6.00 6.0 FT Provided
Planting Strip Width: 6.0 FT Provided
Sidewalk Width: 8.00 6.0 FT Provided
Frontage Width: 0.00

Project to be Completed In One Phase

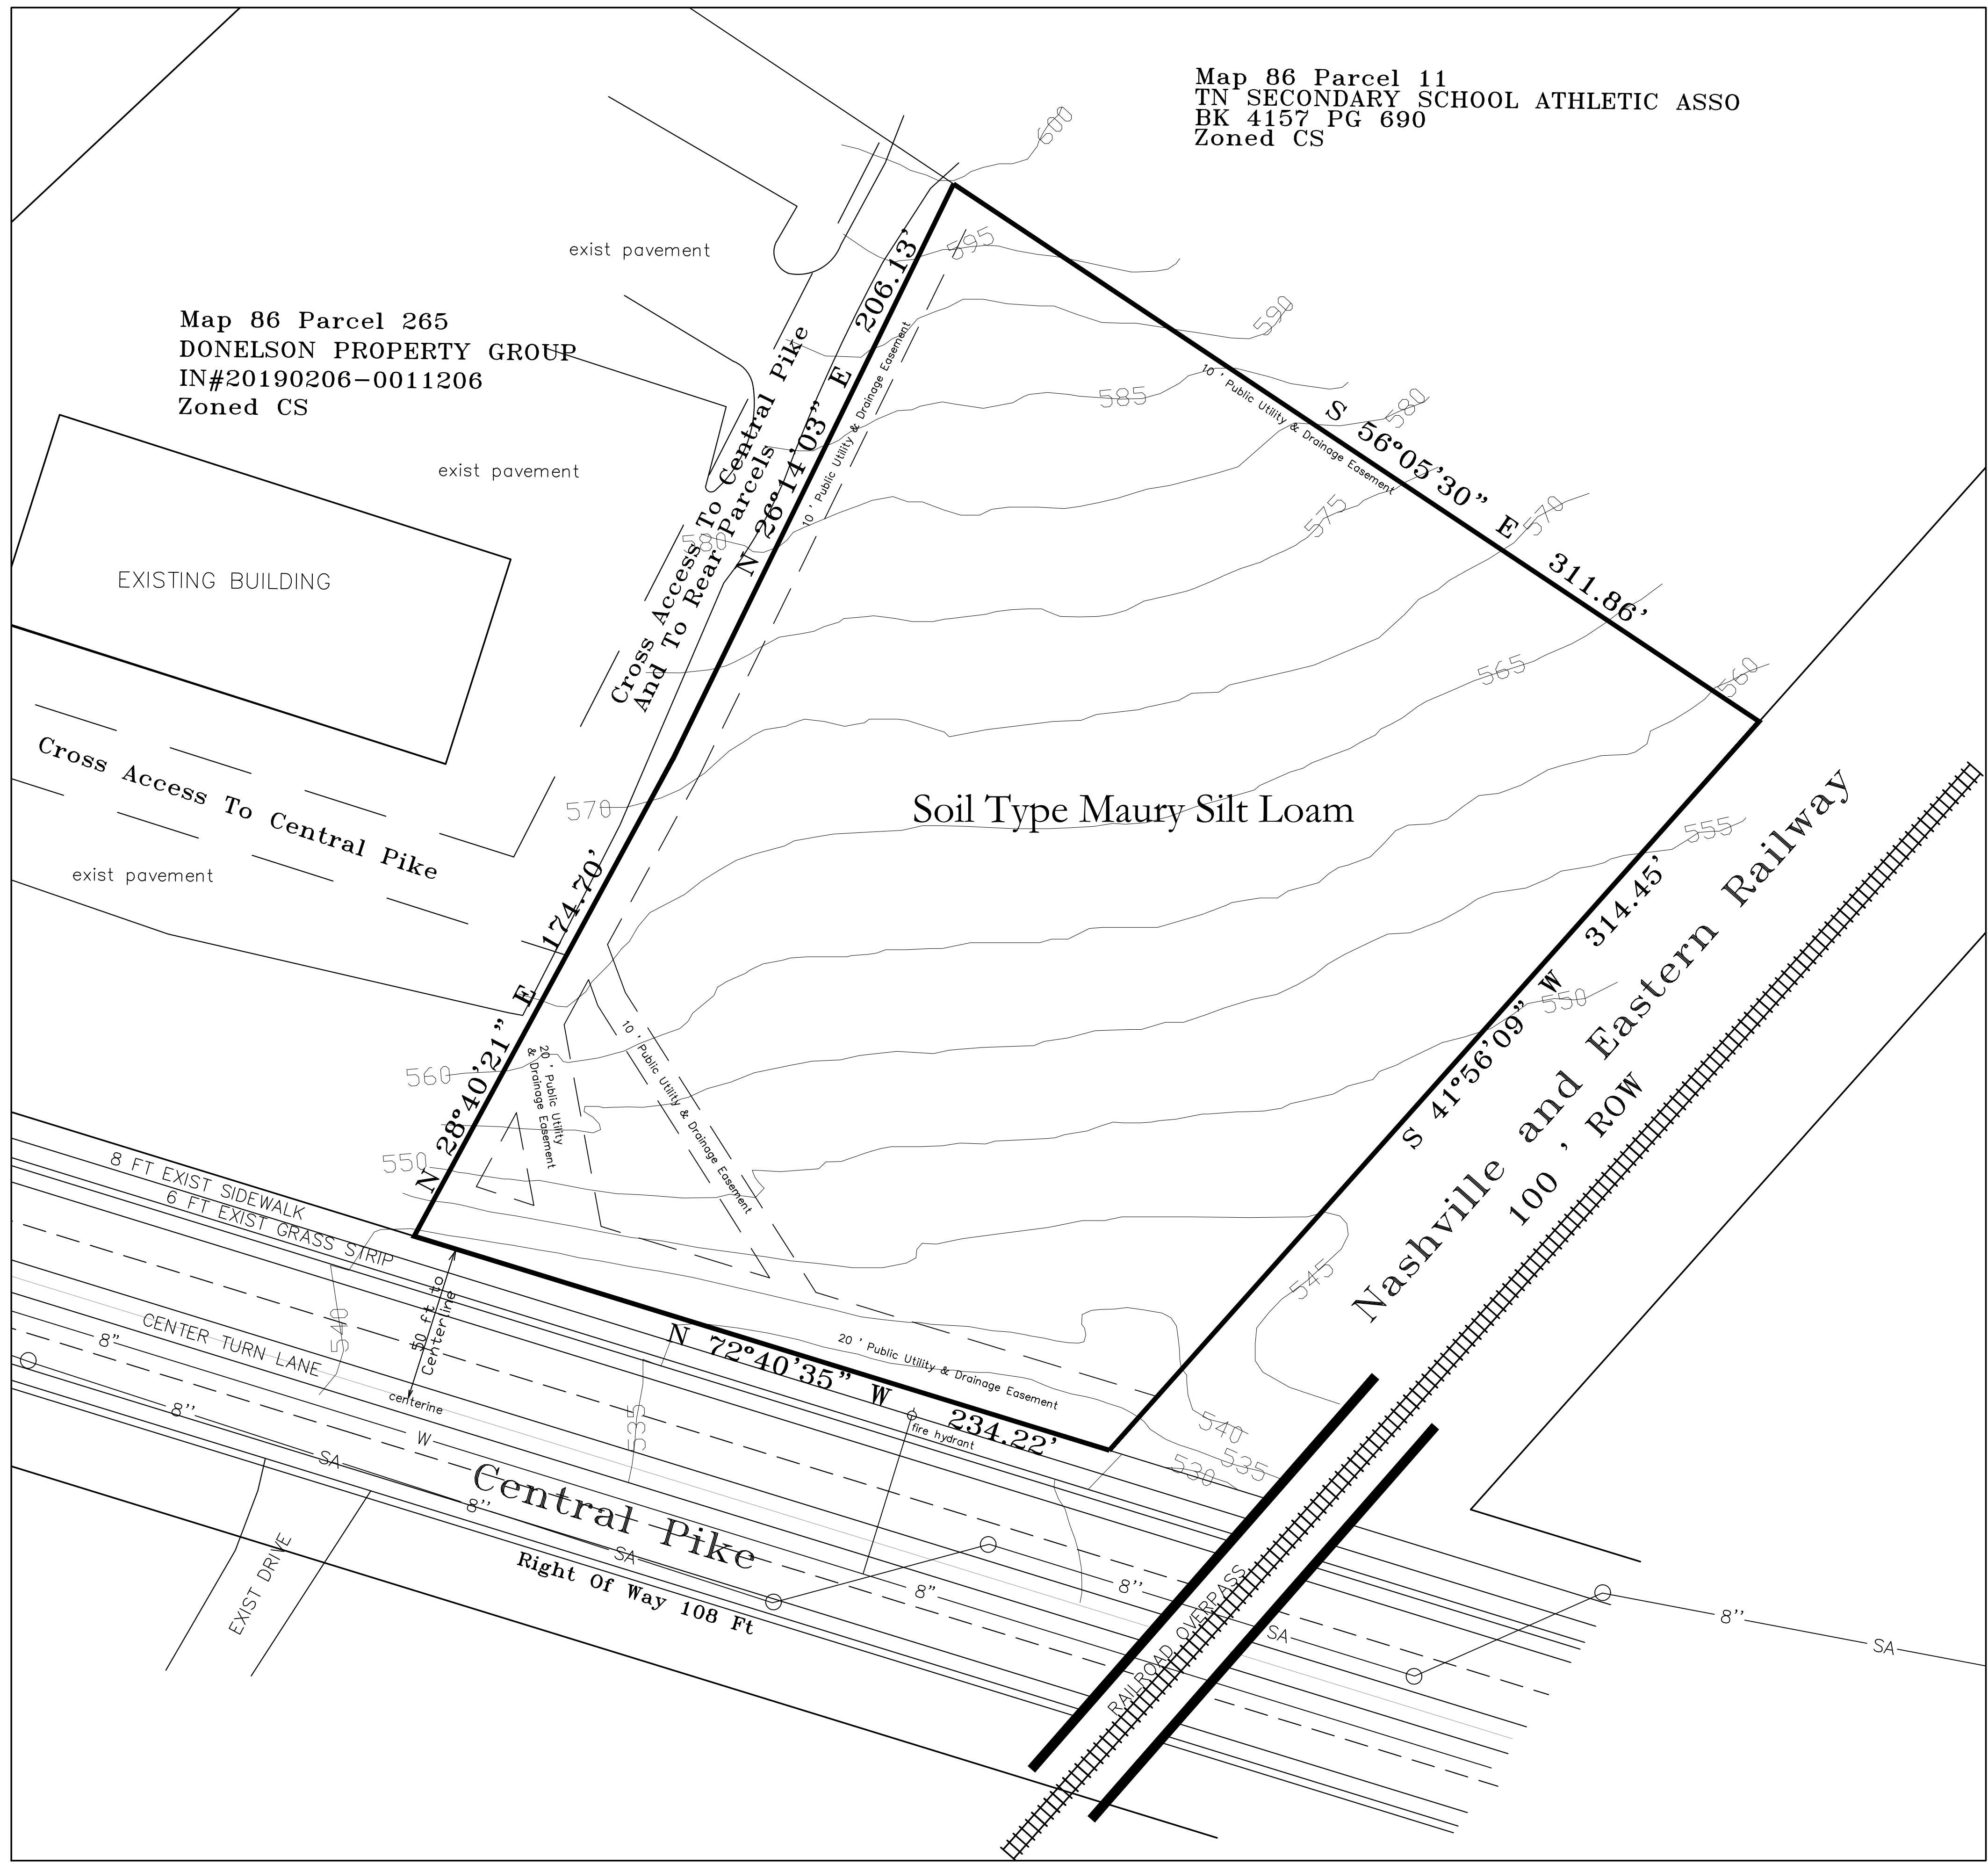



Map 86 Parcel 11
 TN SECONDARY SCHOOL ATHLETIC ASSO
 BK 4157 PG 690
 Zoned CS

Map 86 Parcel 265
 DONELSON PROPERTY GROUP
 IN#20190206-0011206
 Zoned CS

Soil Type Maury Silt Loam

Nashville and Eastern Railway
 100' ROW

Central Pike
 Right Of Way 108 Ft

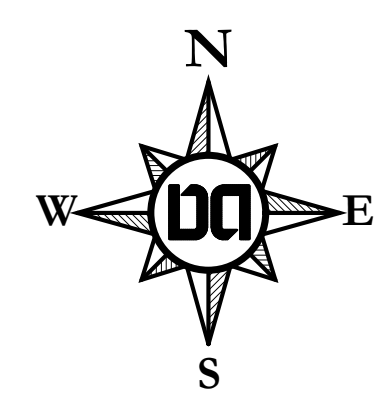

Scale 1" = 30'

BOUNDARY AND TOPO DATA PER METRO GIS

EROSION CONTROL & GRADING NOTES

- 1) EXPOSE AS SMALL AN AREA OF SOIL AS POSSIBLE ON THE SITE FOR NO MORE THAN 15 DAYS. KEEP DUST WITHIN TOLERABLE LIMITS BY SPRINKLING OR OTHER ACCEPTABLE MEANS.
- 2) ALL CUT/FILL AREAS TO HAVE A MINIMUM OF 6" OF TOPSOIL COVER. AREAS DRESSED WITH TOPSOIL SHALL RECEIVE 12 POUNDS PER 1000 SQUARE FEET OF 6-12-12 FERTILIZER (UNLESS OTHERWISE SPECIFIED IN WRITTEN SPECIFICATIONS), 5 POUNDS OR MORE OF KENTUCKY 31 FESCUE SEED PER 1000 SQUARE FEET, AND A STRAW MULCH COVER OF 70%-80% COVERAGE (APPROXIMATELY 125 POUNDS PER 1000 SQUARE FEET), UNLESS OTHERWISE NOTED WITHIN WRITTEN SPECIFICATIONS.
- 3) EROSION CONTROL BARRIER IS CALLED OUT ON PLANS AND IS TO COMPLY WITH THE METROPOLITAN STORMWATER MANAGEMENT MANUAL, VOLUME FOUR, SECTION TCP-14.
- 4) DISTURBED AREAS ARE TO BE GRADED TO DRAIN AS INDICATED IN THE PLAN TO SEDIMENT BARRIERS DURING AND UPON THE COMPLETION OF CONSTRUCTION.
- 5) THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE VERIFICATION AND THE LOCATION OF ANY EXISTING UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO AVOID DAMAGE TO ALL EXISTING UTILITIES DURING CONSTRUCTION. IF DAMAGE DOES OCCUR TO ANY SUCH INSTALLATION, FULL REPAIR WILL BE ACCOMPLISHED AS PER THE CURRENT SPECIFICATION GOVERNING SUCH WORK.
- 6) ANY ACCESS ROUTES TO THE SITE SHALL BE BASED WITH CRUSHED STONE, ASTM #1 STONE, 100 FEET LONG AND AT LEAST 6" THICK.
- 7) THE PLACING AND SPREADING OF ANY FILL MATERIAL IS TO BE STARTED AT THE LOWEST POINT AND BROUGHT UP IN HORIZONTAL LAYERS OF 8" THICKNESS (OR AS DIRECTED BY THE SOILS INVESTIGATIVE REPORT). SAID FILL MATERIAL IS TO BE FREE OF SOD, ROOTS, FROZEN SOILS, OR ANY OTHER DECOMPOSABLE MATERIAL. SAID FILL IS TO BE COMPACTED TO A MINIMUM OF 95% STANDARD PROCTOR, OR AS OTHERWISE SPECIFIED BY THE SOILS REPORT OR WRITTEN SPECIFICATIONS.
- 8) THE CONTRACTOR SHALL NOTIFY THE METRO DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS CONSTRUCTION COMPLIANCE DIVISION, THREE DAYS PRIOR TO BEGINNING THE WORK.
- 9) THE CONTRACTOR SHALL LOCATE AND STAKE THE LAYOUT OF THE SITE IN THE FIELD FOR INSPECTION BY THE ENGINEER. THE CONTRACTOR SHALL CHECK THE GRADES AND FINAL DIMENSIONS ON THE GROUND, AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY FOR A DECISION.
- 10) SURPLUS EXCAVATION OF TOPSOIL SHALL BE PLACED ON THE SITE AS APPROVED BY THE OWNER FOR THE PURPOSE OF FUTURE LANDSCAPE USE.
- 11) THE CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY TEMPORARY WORKS FOR THE PROTECTION OF THE PUBLIC AND EMPLOYEES, INCLUDING WARNING SIGNS AND LIGHTS.
- 12) THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE PREMISES OR ADJACENT PREMISES OR INJURIES TO THE PUBLIC DURING THE CONSTRUCTION CAUSED BY HIMSELF, HIS SUB-CONTRACTORS, OR THE CARELESSNESS OF ANY OF HIS EMPLOYEES.
- 13) ALL WORK IS TO BE COMPLETED WITH COMPLIANCE TO THE RULES AND REGULATIONS SET FORTH BY METRO WATER SERVICES. THE CONTRACTOR SHALL GIVE ALL NECESSARY NOTICE, OBTAIN ALL PERMITS, AND PAY FEES REQUIRED FOR THE COMPLETION OF HIS PORTION OF THE WORK. HE SHALL ALSO COMPLY WITH ALL CITY, COUNTY AND STATE LAWS AND ORDINANCE OR REGULATIONS RELATING TO PORTIONS OF WORK WHICH HE IS TO PERFORM.
- 14) ALL EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL SITE IS STABILIZED & CONSTRUCTION IS COMPLETE.
- 15) CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUELING IN ACCORDANCE WITH METRO CP-10 & CP-13. LOCATION TO BE COORDINATED WITH THE NPDES DEPARTMENT DURING THE PRE-CONSTRUCTION MEETING.


DEVELOPMENT SUMMARY	
Property Information	3525 Central Pike Nashville, TN 37076 Map 86 Parcels 769 2.12 Acres
Council District 14 (Jordan Huffman)	
Owner of Record	Donelson Property Group 2517 Lebanon Pike, Suite 302 Nashville, TN 37014
Developer	MV Commercial Construction LLC 823 Gervais Street, Suite 200 Columbia, SC 29201
Civil Engineer	Dale and Associates 516 Heather Place Nashville, Tennessee 37204 Contact: Roy Dale, PE Phone: 615-297-5166 Email: roy@daleandassociates.net



REVISIONS:

Preparation Date:

3525 Central Pike
Preliminary Specific Plan
 Being Parcel 769 on Tax Map 86
 Nashville, Davidson County, Tennessee

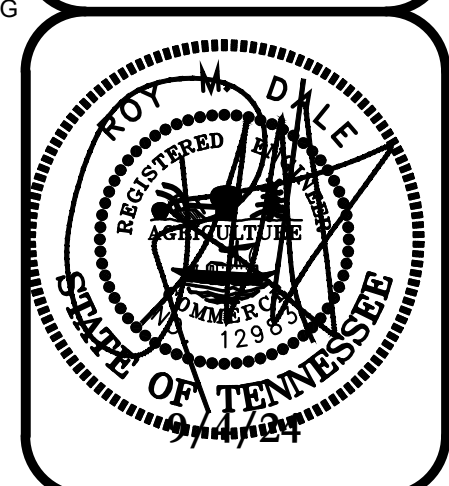


Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Surveying

Existing
 Conditions



MPC Case Number
 2024SP-035-001

3525 Central Pike SP

C2.0
 Sheet 2 of 4

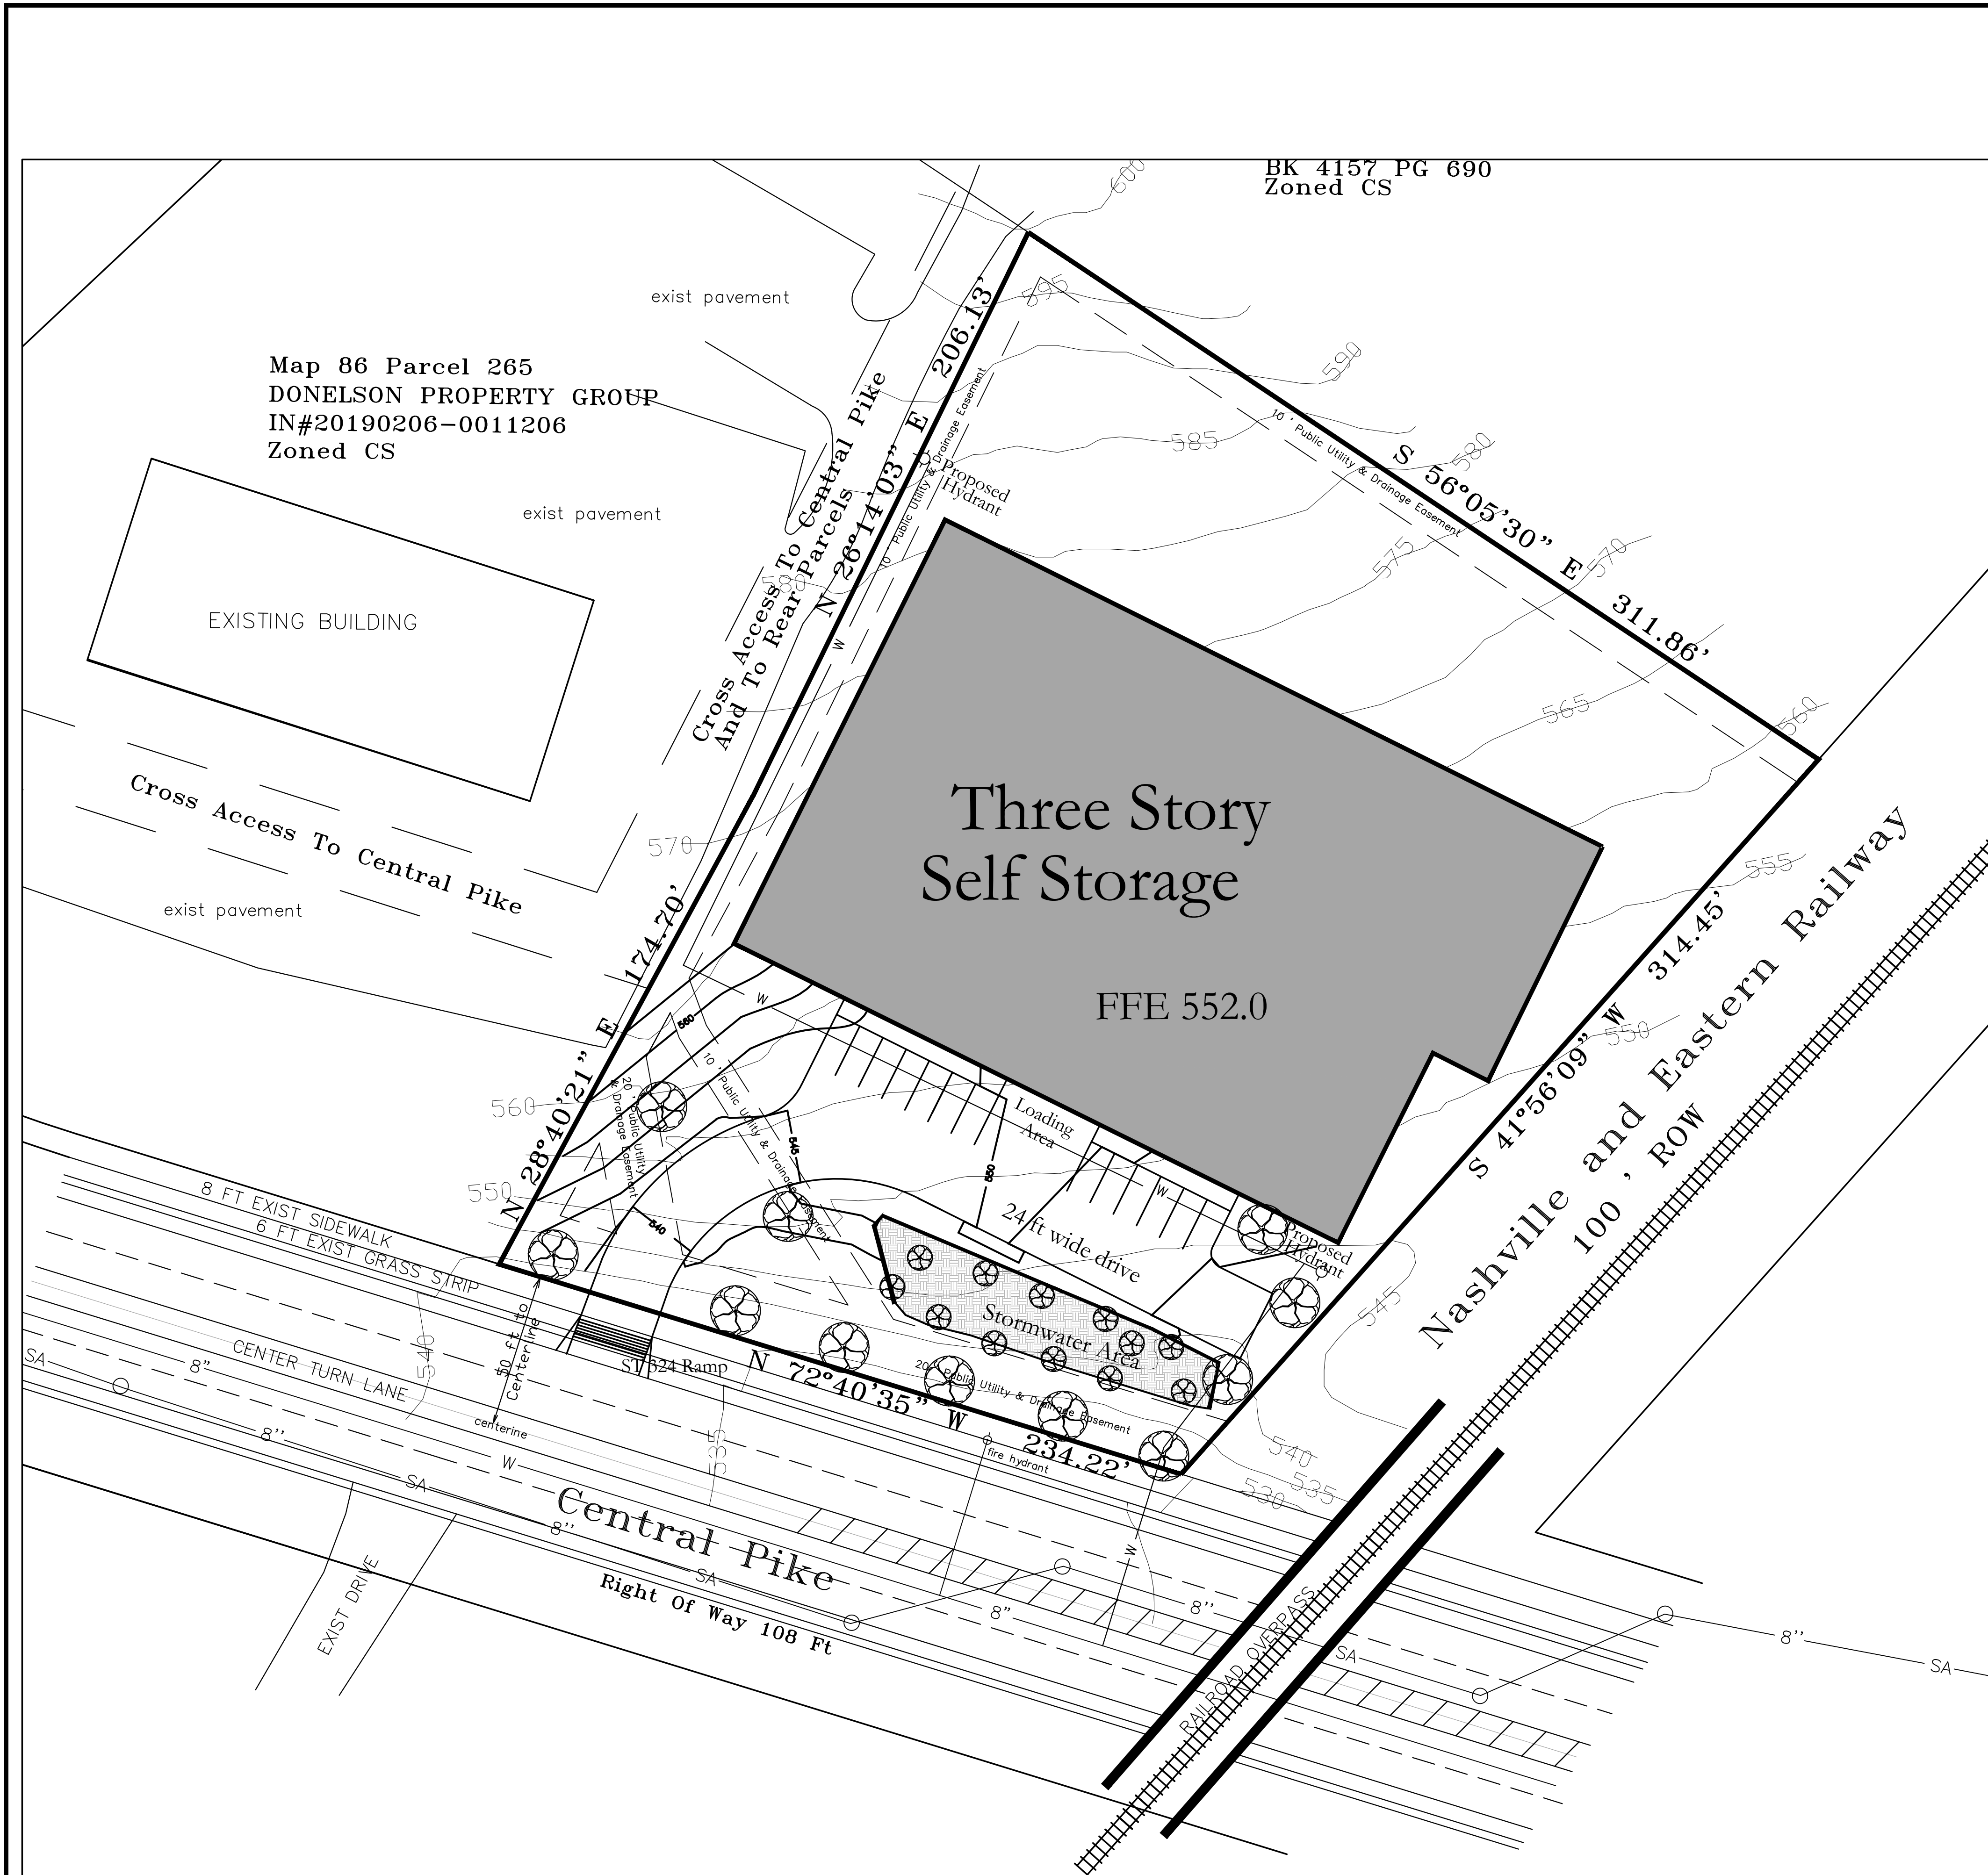

To Be Developed In One Phase

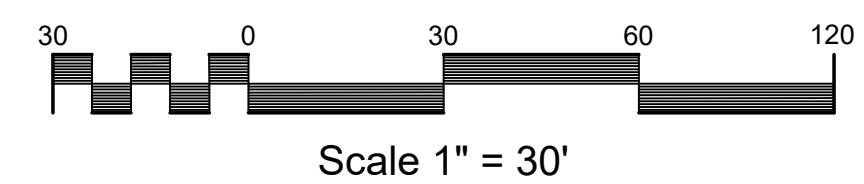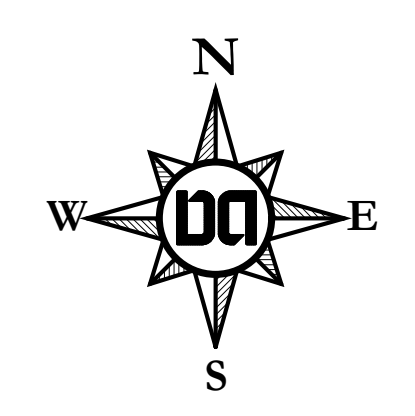


REVISIONS:

Preparation Date:

SPECIFIC PLAN DEVELOPMENT SUMMARY	
USE	COMMERCIAL/SELF STORAGE
PROPERTY ZONING	CS
TOTAL PROPERTY SIZE	2.12 ACRES
TOTAL BUILDING FLOOR AREA	112,000 SF
FAR	1.21
ISR	0.60
STREET YARD SETBACK:	50' MEASURED FROM RIGHT OF WAY
SIDE YARD	10'
REAR YARD	20'
HEIGHT STANDARDS	3 STORIES MAX. IN 45 FT (OVERALL HEIGHT TO BE MEASURED FROM THE AVERAGE ELEVATION (AVERAGE OF 4 MOST EXTERIOR CORNERS) AT THE FINISHED GRADE TO THE MIDPOINT OF THE PRIMARY ROOF PITCH TO TOP OF PARAPET FOR A FLAT ROOF.
PARKING AND ACCESS	
RAMP LOCATION AND NUMBER	ONE POINT OF ACCESS - (1) CENTRAL PIKE
REQUIRED PARKING	4 SPACES
PARKING PROPOSED	13 PARKING SPACES


3525 Central Pike
Preliminary Specific Plan
 Being Parcel 769 on Tax Map 86
 Nashville, Davidson County, Tennessee

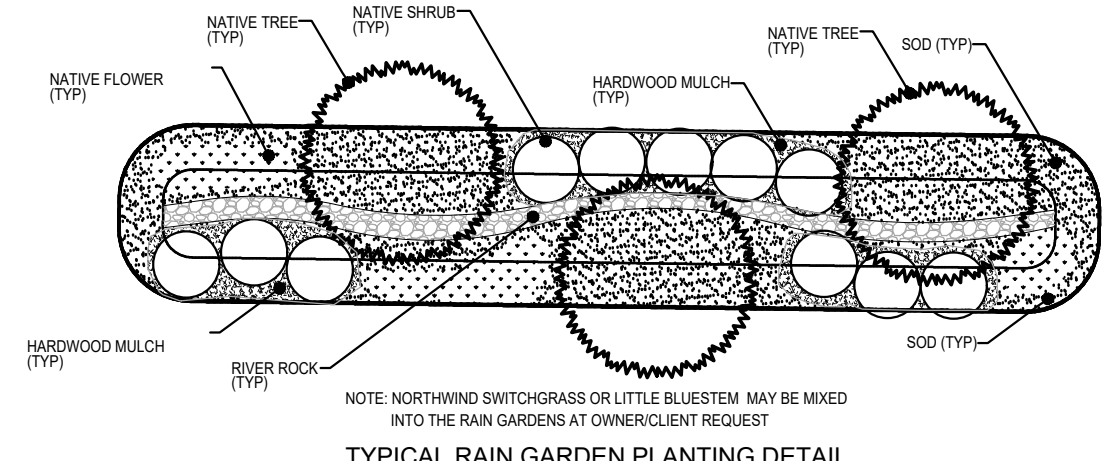

Tree Density Notes

Metro tree density requirements will be addressed in final construction documents. At the preliminary phase of this project no detailed tree information is available.

DEVELOPMENT SUMMARY	
Property Information	
3525 Central Pike Nashville, TN 37076 Map 86 Parcels 769 2.12 Acres	
Council District 14 (Jordan Huffman)	
Owner of Record	
Donelson Property Group 2517 Lebanon Pike, Suite 302 Nashville, TN 37014	
Developer	
MV Commercial Construction LLC 823 Gervais Street, Suite 200 Columbia, SC 29201	
Civil Engineer	
Dale and Associates 516 Heather Place Nashville, Tennessee 37204 Contact: Roy Dale, PE Phone: 615-297-5166 Email: roy@daleandassociates.net	

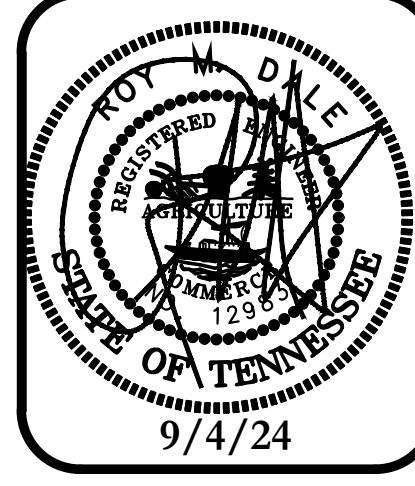


Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Surveying

SP Layout

MPC Case Number
2024SP-035-001

3525 Central Pike SP
C3.0
 Sheet 3 of 4



516 Heather Place
Nashville, Tennessee 37204
(615) 297-5166

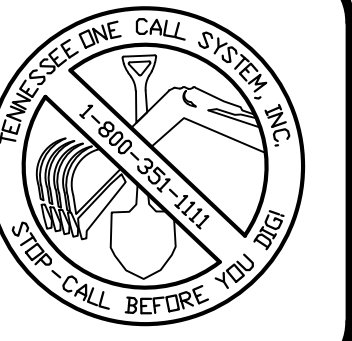

REVISIONS:


Preparation Date:

3525 Central Pike
Preliminary Specific Plan
Being Parcel 769 on Tax Map 86
Nashville, Davidson County, Tennessee

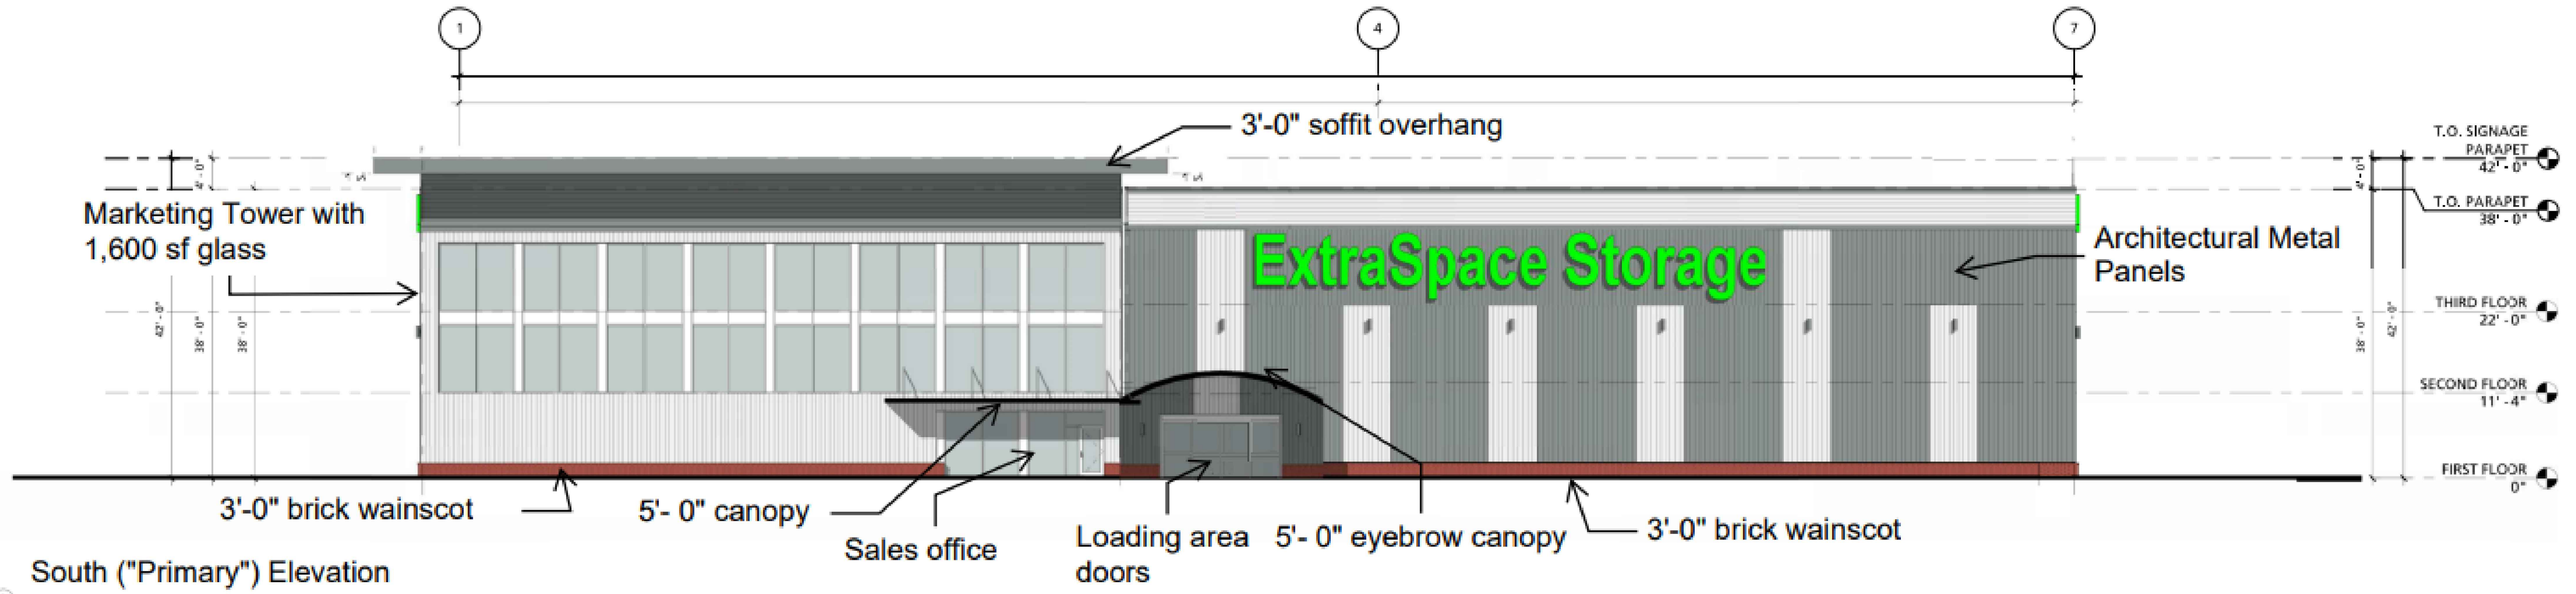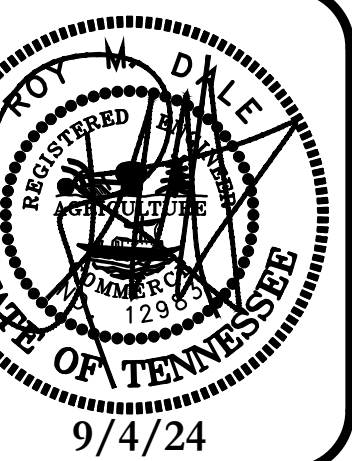

South ("Primary") Elevation

1 3/32" = 1'-0"

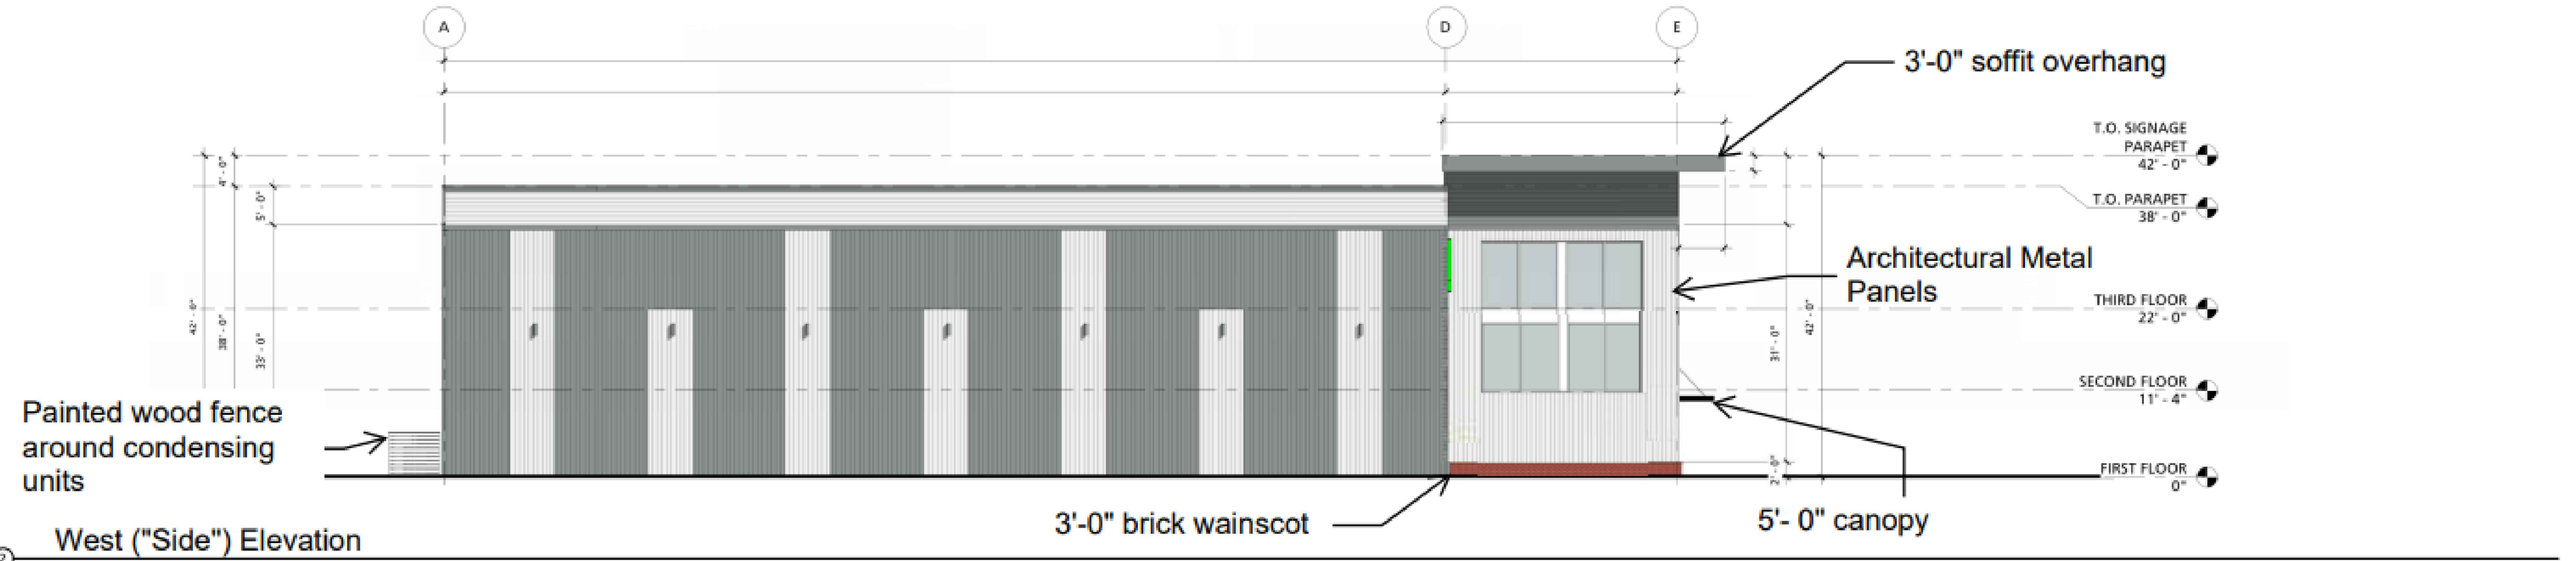

West ("Side") Elevation

2 3/32" = 1'-0"

Building Elevations

Dale & DD
Associates
Consulting Civil Engineering
Land Planning & Zoning
Surveying

MPC Case Number
2024SP-035-001

3525 Central Pike SP

C4.0

Sheet 4 of 4

516 Heather Place
Nashville, Tennessee 37204
(615) 297-5166